

# **PRODUCT SPECIFICATION**



# Part No. : JH-5050RGB18J45-T8A-3 High Power LED

# Catalog

1.Product Features	P2
2. Dimensions	P2
3.Absolute Maximum Rating	Р3
4.Optical Character	Р3
5.Optical Character Curves	P4
6.Spectrum Curves	P5
7.Viewing Angle Curves	P5
8.Tape&Reel Packing	P6
9.Soldering Advice	P7
10.Cautions	P8




### 1.Product Features

- High Brightness RGB LED Plane
   Package
- Viewing Angle 180 Degree
- Transparent Silicone

- Chip Material: IngaN AlGaInP
- RoHS Compliant

#### 2.Dimensions




5. 15 5 1 1 28 0 0. 65 2. 6 0. 65

Top view


**Bottom view** 



Side view



Perspective view



#### **Notes:**

- 1. All dimensions are in millimeters.
- 2. Tolerance is ±0.1mm unless otherwise noted.



# 3.Absolute Maximum Rating @ Ta=25° C

Parameter	Symbol	Maximum Rating	Unit	
Continuous Forward Current	IF	700	mA	
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFp	1000	mA	
Reverse Voltage	VR	5	V	
Power Dissipation	PD	9	W	
Electrostatic Discharge	ESD	1000	V	
Operating Temperature Range	TOPR	-25°C to +60°C		
Storage Temperature Range	TSTG	-35°C to +80°C		
Lead Soldering Temperature	TSOL	260°C		

# 4.Optical Character @ Ta=25° C

Parameter	Symbol	Color	Min.	Тур.	Max.	Unit	Test Condition
Forward Voltage	VF	R	2.2	2.4	2.6	V	I <sub>F</sub> =700mA
		G	3.2	3.4	3.6	V	I <sub>F</sub> =700mA
		В	3.2	3.4	3.6	V	I <sub>F</sub> =700mA
Luminous flux Ф		R	80	90	100	Lm	I <sub>F</sub> =700mA
	Ф	G	130	140	150	Lm	I <sub>F</sub> =700mA
		В	25	30	35	Lm	I <sub>F</sub> =700mA
Dominant Wavelength Wld	Wld	R	620	622.5	625	nm	I <sub>F</sub> =700mA
		G	520	522.5	525	nm	I <sub>F</sub> =700mA
	В	460	462.5	465	nm	I <sub>F</sub> =700mA	
Reverse Current	IR				10	μΑ	V <sub>R</sub> =5V
Viewing Angle	2θ1/2				180	deg	I <sub>F</sub> =700mA
Recommend Forward Current	IF(rec)	RGB			700	mA	


#### **Notes:**


Measurement tolerance of forward voltage  $\pm 0.1 V$ 





# **5.** Optical Character Curves

#### ( 25 ° Ambient Temperature Unless Otherwise Noted )

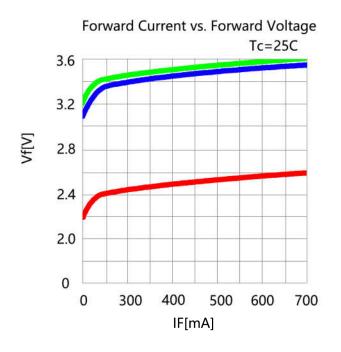

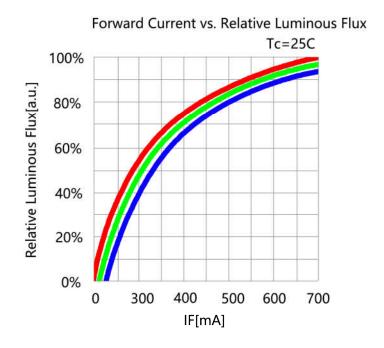




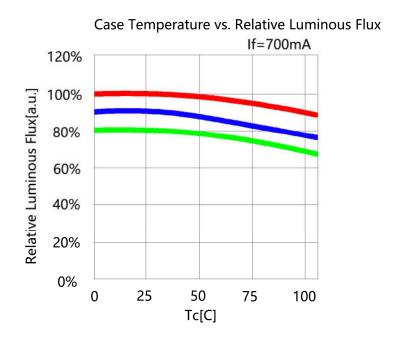




# **6.** Spectrum Curves

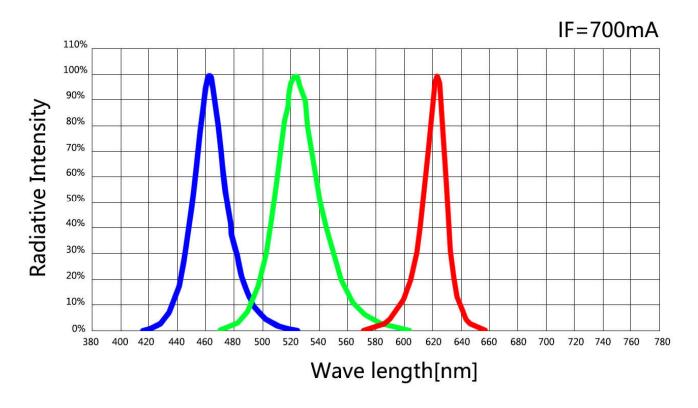


## 7. Viewing Angle Curves

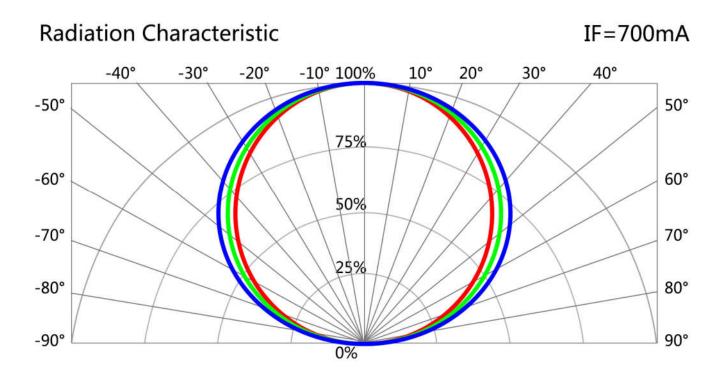



## 8. Tape&Reel Packing

1. Recommend unpacked LED beads be welded within one day, if not, please vacuumize again and store in an environment of 20-35°C and 30-60% humidity. If can't vacuumize, please store LED beads in moisture proof box, control at  $25^{\circ}$ C + 3°C, humidity 50-60%. If unpacked above 1 week, bake at  $60\pm5^{\circ}$ C for 10-12 hours before weld.

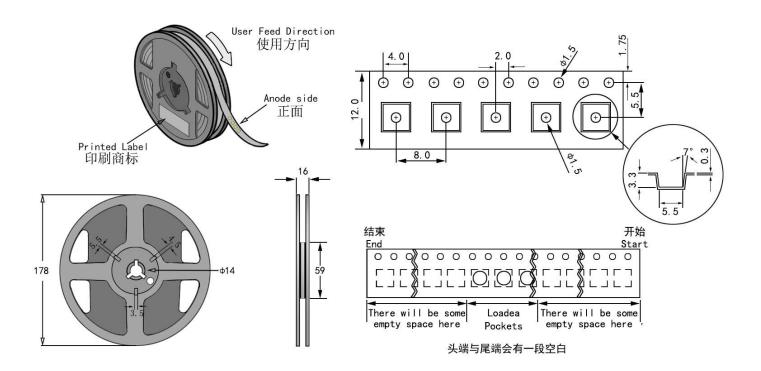

#### **Notes:**

1. QTY: 1000pcs/Reel


2. Tolerance ±0.2mm.

3. Package: P/N



# **9.**Soldering Advice

1. When soldering,don't touch the LED appearance gel during,this bad operation will destroy the LED.Moding LED usually use reflow soldering, please refer to the following reflow temperature curve, and recommend the user follow the soldering temperature curve of the solder paste.

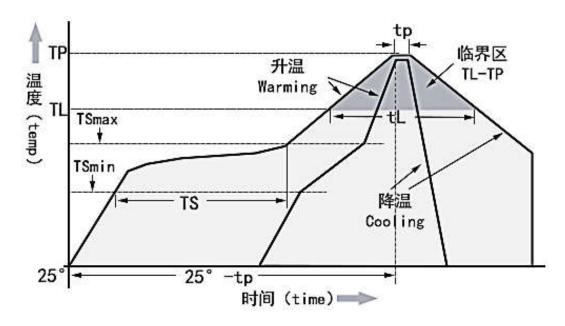

Temperature Curve Character	Lead-free solder			
Average heating rate(TSmin to Tp)	最高 3℃/秒			
	Top 3 ℃ / s			
Preheating: Minimum temperature ( TSmin )	90℃			
Preheating: Maximum temperature ( TSmax)	200℃			
Preheating: Time ( TSmin to TSmax)	60-180 s			
Duration above temperature: Temperature TL	240℃			
Duration above temperature: Time tL	60-150 s			
Peak/classification temperature (Tp)	260℃			
Time within 5°C of actual peak temperature (tp)	20-40 s			
	最高 6℃/秒			
Cooling speed	The highest 6 ℃ / s			
T' / 1 1 1 / 1 / 2500	最多8分钟			
Time to reach peak temperature at 25℃	8 minutes Max			



# 10.Cautions


#### 1. Electrostatic Treatment

Do a full range of anti-static measures (such as: anti-static ring, anti-static clothes, machine, equipment grounding wire, etc.)



#### 2. Heat Dissipation

- A. It is recommend to configure reasonable heat dissipation device for the product.
- The best working temperature range of the product is 40-60°. It is recommended to control the working temperature of the product within a reasonable range.

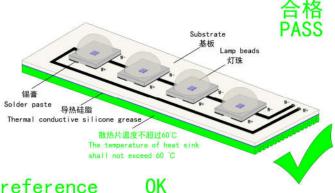

#### 3. Installation Conditions

reference

A. Do not exert any pressure on the LED area during the use of the led beads. If the machine is used to take materials, select a suction nozzle of reasonable size, such as below:

